


KAIMAN



WOOD AND
GLASS
SHELVING
SYSTEMS

KAIMAN

KAIMAN: combined wall bracket and shelf support for glass shelf 7 to 19mm thick and wood shelf 18 to 41mm thick.

Can be fixed:

- to cement wall with rawlplug Ø 8mm and pan head screw Ø 5x50mm.
 - to plaster board with umbrella fitting Ø 8mm & pan head screw M4x46mm.
 - to wood panels 18mm thick with special designed spreading dowel and M6 bolt.
- Useful fixing method for aligning wall brackets and easy shelf inclination adjustment as required.

Capable of supporting a 25Kg load each (shelf weight included), for a shelf 320mm deep.

Zinc alloy

Engineering plastic

7-41 mm




25 kg for each shelf support
for shelf 320 mm deep




INSTALLATION AND ADJUSTMENTS

WOOD PANEL



Recommended fixing countersunk screw type - head Ø 5 mm max.

SOLID AND PLASTERBOARD WALLS




It is the responsibility of the customer:



- to ensure that the wall is of a suitable quality to hold the shelf fixing in place.
- to use the proper hardware fittings according to the construction of the wall.

For more specific information, please refer to the WARNINGS section at the end of the catalogue.

BRACKET ALIGNMENT


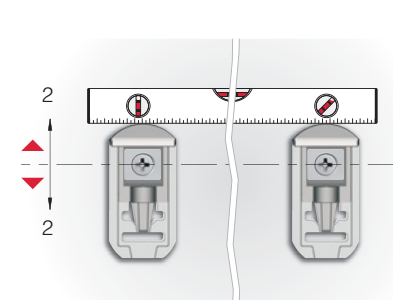


SHELF LOCKING AND INCLINATION ADJUSTMENT

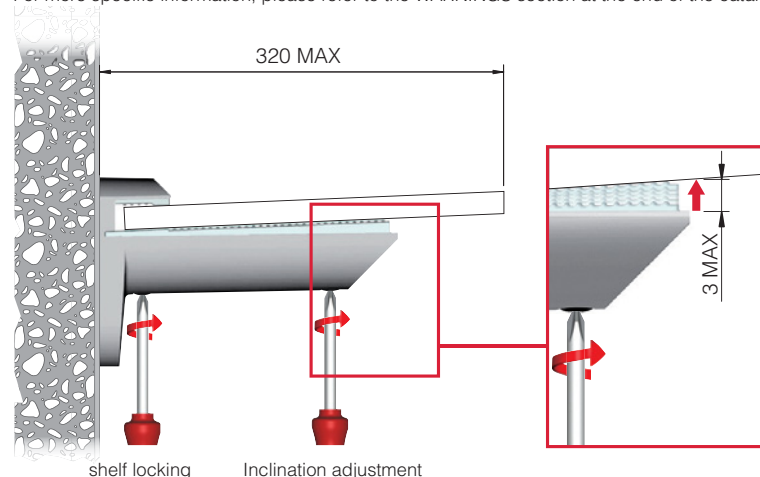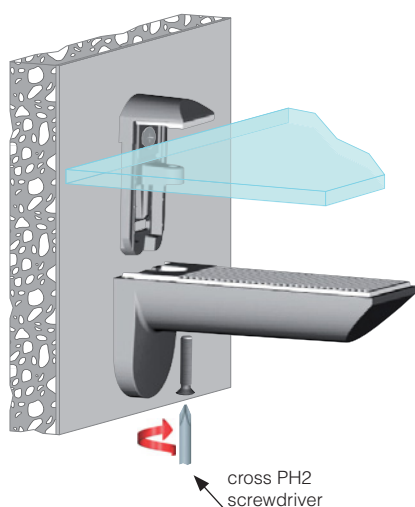

COMBINATION SHELF LOAD AND SHELF DEPTH

(The figures refer to 1 shelf support)

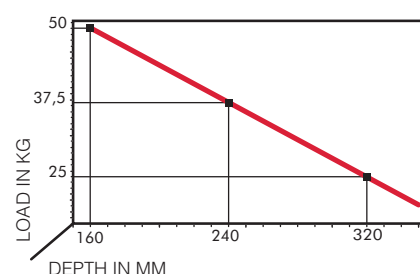


+ shelf weight = 25 kg MAX for
each shelf support


www.italianaferramenta.com




POSITION OF THE RIDGE PLATE

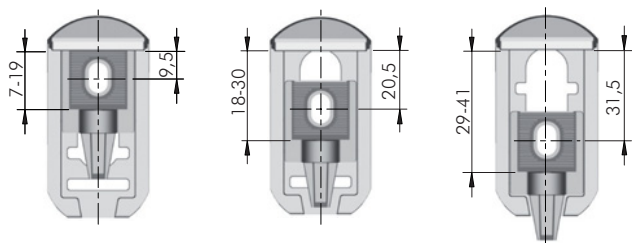


Glass shelves



Wood and honeycomb shelves



Shelf is clamped between a layer of ridged plastic on both the lower and upper side (coloured parts).

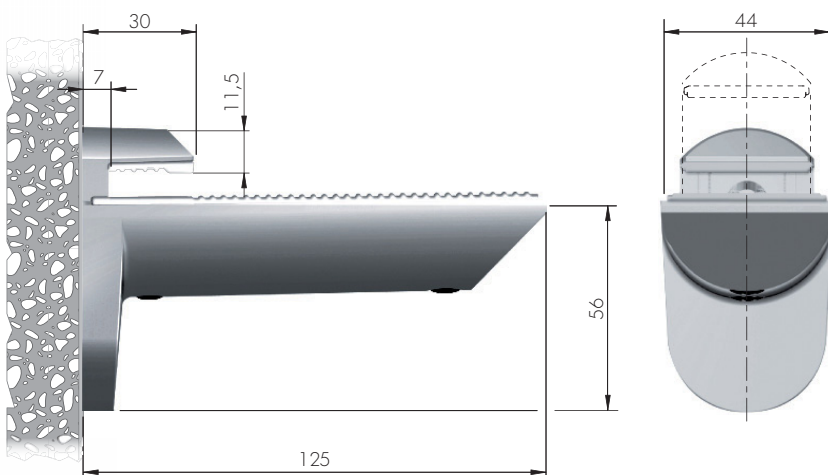

= PH2 	= 25 pairs
16102020JL 16102020YD 16102020KB 16102020ZQ	

NOTE: KAIMAN is supplied in carton box including 2 pieces, accessories and fitting guide. Countersunk fixing screws Ø 5x50 and rawlplugs Fischer SX Ø 8x40 to wall are included.

