

TRIADE SLIM




OPTIONAL SECURITY LOCKING

18 mm min.



15 kg per pair for shelf 200 mm deep

PAT. PENDING

SPECIFICATION

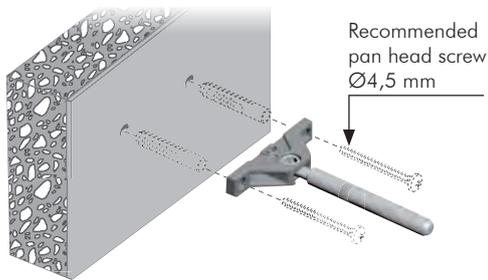


Recommended pan head screw  
Ø4,5 mm

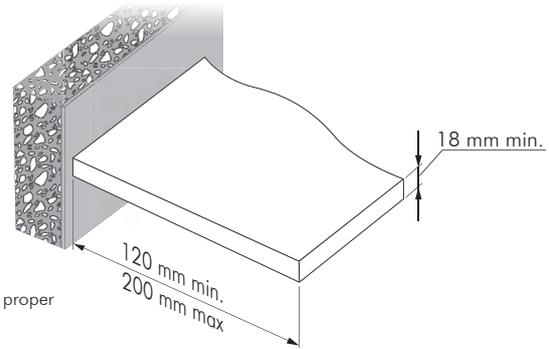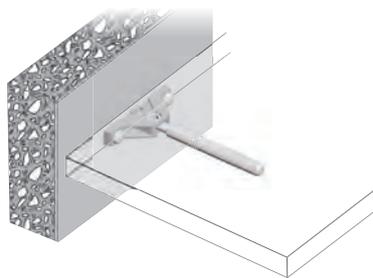

It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall.  
For more specific information, please refer to the WARNINGS section at the end of the catalogue.

ADJUSTMENT

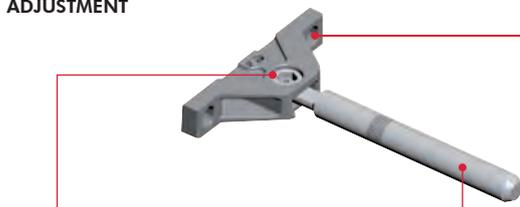


Act on the grub screw to change pin inclination.



IMPORTANT:  
when adjustments are finished, screw the ring to block the vertical movement of the pin.






BRACKET ALIGNMENT



LATERAL ADJUSTMENT




INCLINATION ADJUSTMENT

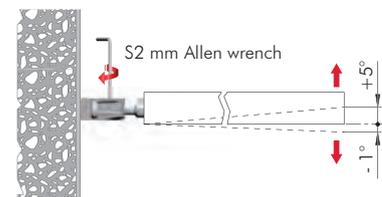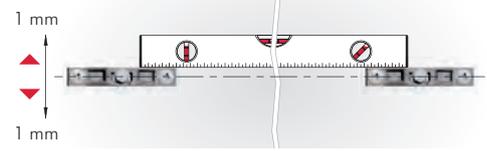



LOADING CAPACITY CHART

(The figures refer to 2 shelf supports)

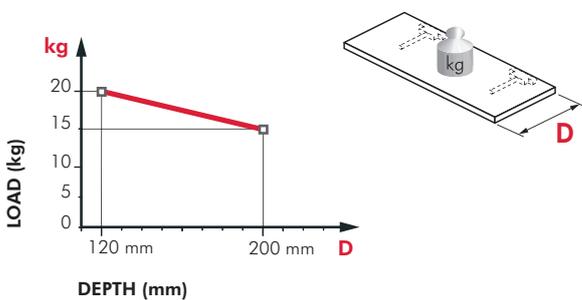

RECOMMENDED NUMBER OF TRIADE SLIM PER SHELF

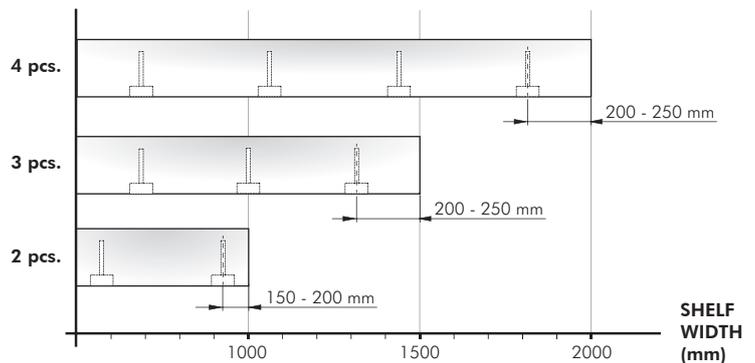

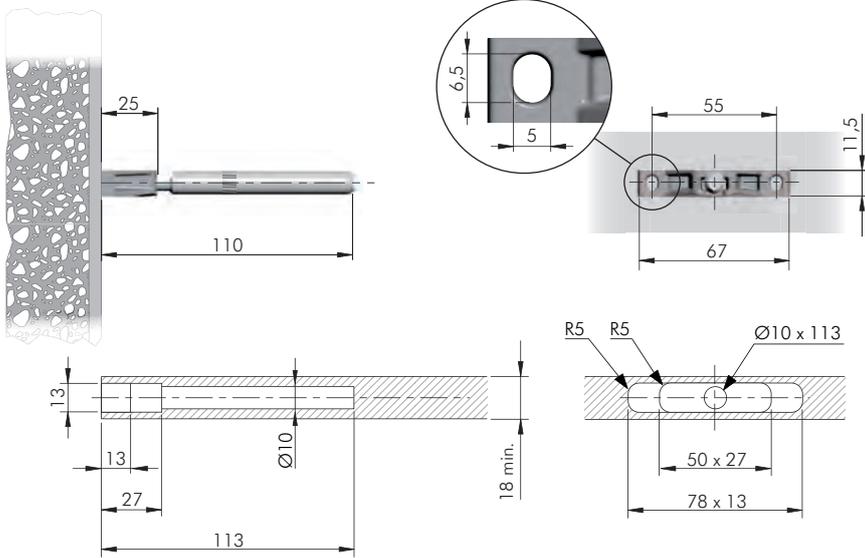

= open ended wrenches S2 and S6



ZA ST EP

= 100 pcs.



**1622501000**

## OPTIONAL DRILLING FOR SECURITY LOCKING

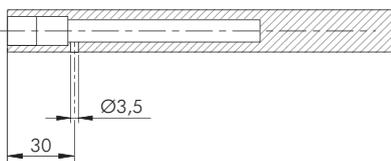

= S2 mm

ST

= on request



**21105210ZN**



6

18-20 mm

**21105180ZN**

10



25 mm

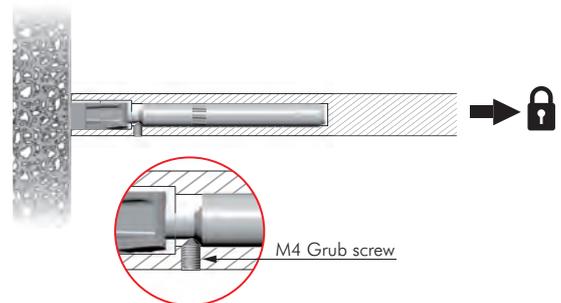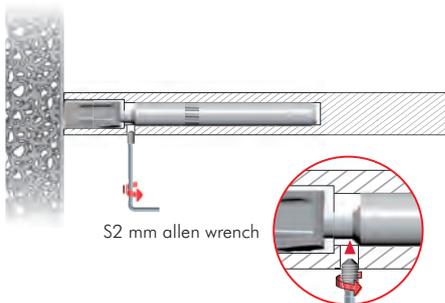


TRIADE SLIM AND BRACKET




OPTIONAL SECURITY LOCKING

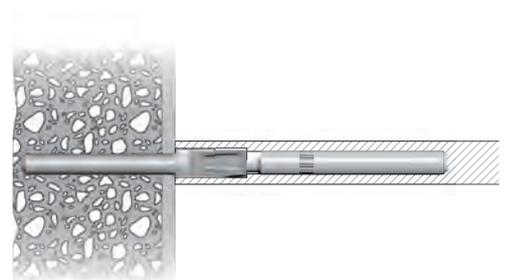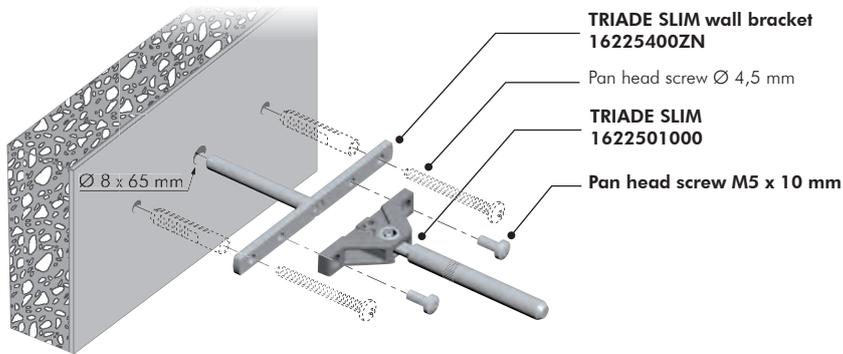

The wall bracket guarantees a more stable fixing to the wall. It is the responsibility of the customer: to ensure the wall is of a suitable quality to hold the shelf fixing in place and to use the proper hardware fittings according to the construction of the wall. For more specific information, please refer to the WARNINGS section at the end of the catalogue.

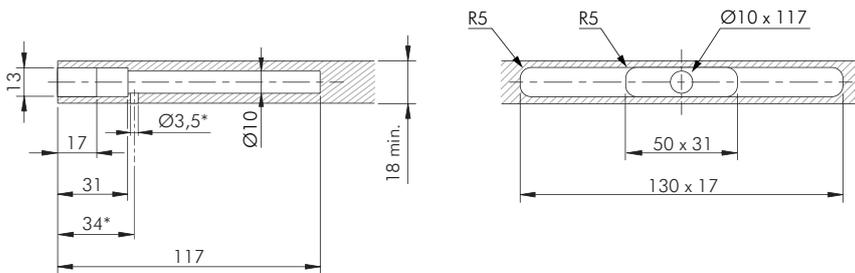

\* Optional drilling for security locking with M4 grub screw placed underneath in alignment with the cavity. For details refer to Triade Slim section.

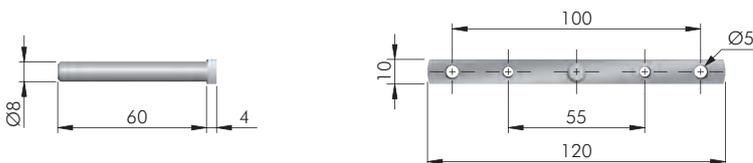

FIXING ACCESSORY



ST = 100 pcs.

**16225400ZN**

= M5 = PZ2

ST = on request.

**60334140ZN**